

WEIGHT CAPACITY
1500 kg



RADIUS
5000 mm



PRESSURE
0.7-0.9 Mpa



LOAD OFF-SET

VERTICAL LIFT
3050 mm


VERSIONS
COLUMN
FIXED
OVERHEAD
RUNNING
OVERHEAD

Pneumatic Manipulator **MEGAPARTNER MG** with articulated arm

MEGAPARTNER MG, is a Manipulator with extremely high load capacity, is able to handle loads up to 1500 kg and reach working radii up to 5000 mm with loads of 650 kg, maintaining a good handiness and fluidity, assuring the operator to work with moderate efforts in good ergonomic conditions and with the utmost safety.


MEGAPARTNER® - MG

Megapartner column mounted - MGC

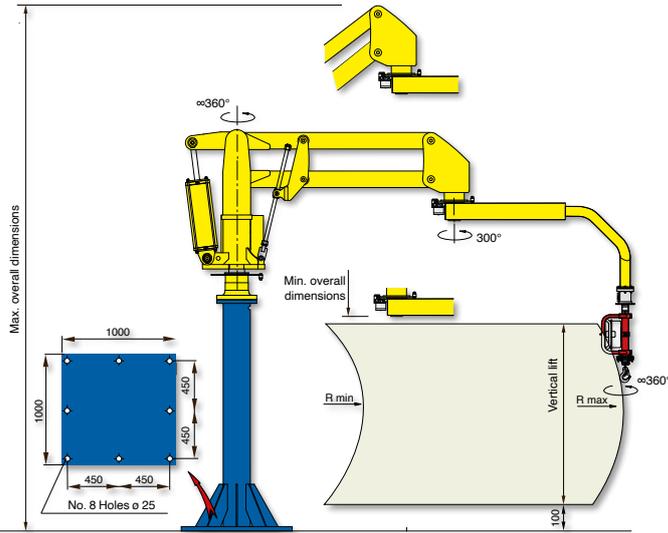


Structural versions: column mounted on fixed base-plate, autostable base-plate of our supply properly dimensioned.

Megapartner fixed overhead - MGF

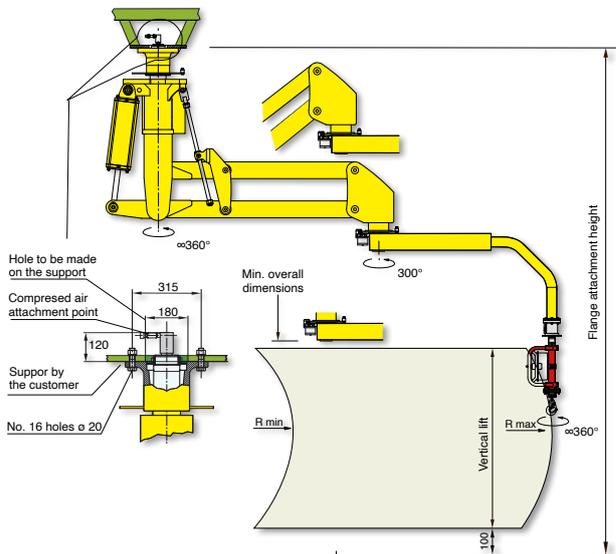

Megapartner running overhead - MGS

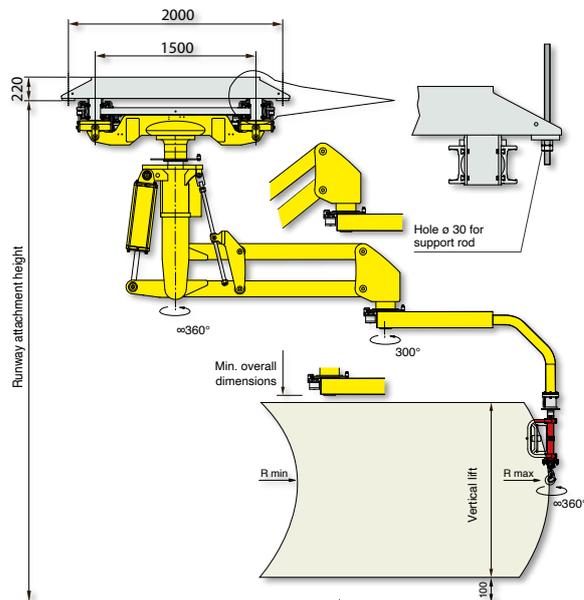

Vertical lift 1500 mm
 Min. overall dimensions 2000 mm
 Max. overall dimensions ± 4300 mm
 Flange attachment height 4500 mm
 Runway attachment height 4800 mm


Vertical lift 1850 mm
 Min. overall dimensions 2000 mm
 Max. overall dimensions ± 4650 mm
 Flange attachment height 4500 mm
 Runway attachment height 4800 mm

Vertical lift 2150 mm
 Min. overall dimensions 2000 mm
 Max. overall dimensions ± 4950 mm
 Flange attachment height 4500 mm
 Runway attachment height 4800 mm


Vertical lift 2450 mm
 Min. overall dimensions 2000 mm
 Max. overall dimensions ± 5250 mm
 Flange attachment height 4500 mm
 Runway attachment height 4800 mm

Vertical lift 2750 mm
 Min. overall dimensions 2000 mm
 Max. overall dimensions ± 5550 mm
 Flange attachment height 4500 mm
 Runway attachment height 4800 mm

Vertical lift 3050 mm
 Min. overall dimensions 2000 mm
 Max. overall dimensions ± 5850 mm
 Flange attachment height 4500 mm
 Runway attachment height 4800 mm

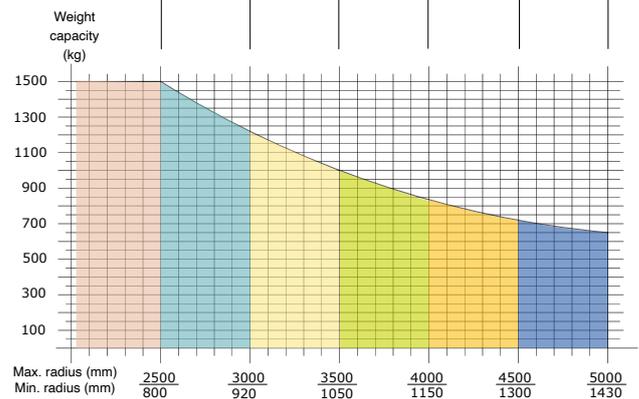

Air supply: dry and oil-free compressed air min. constant 0.7÷0.9 MPa

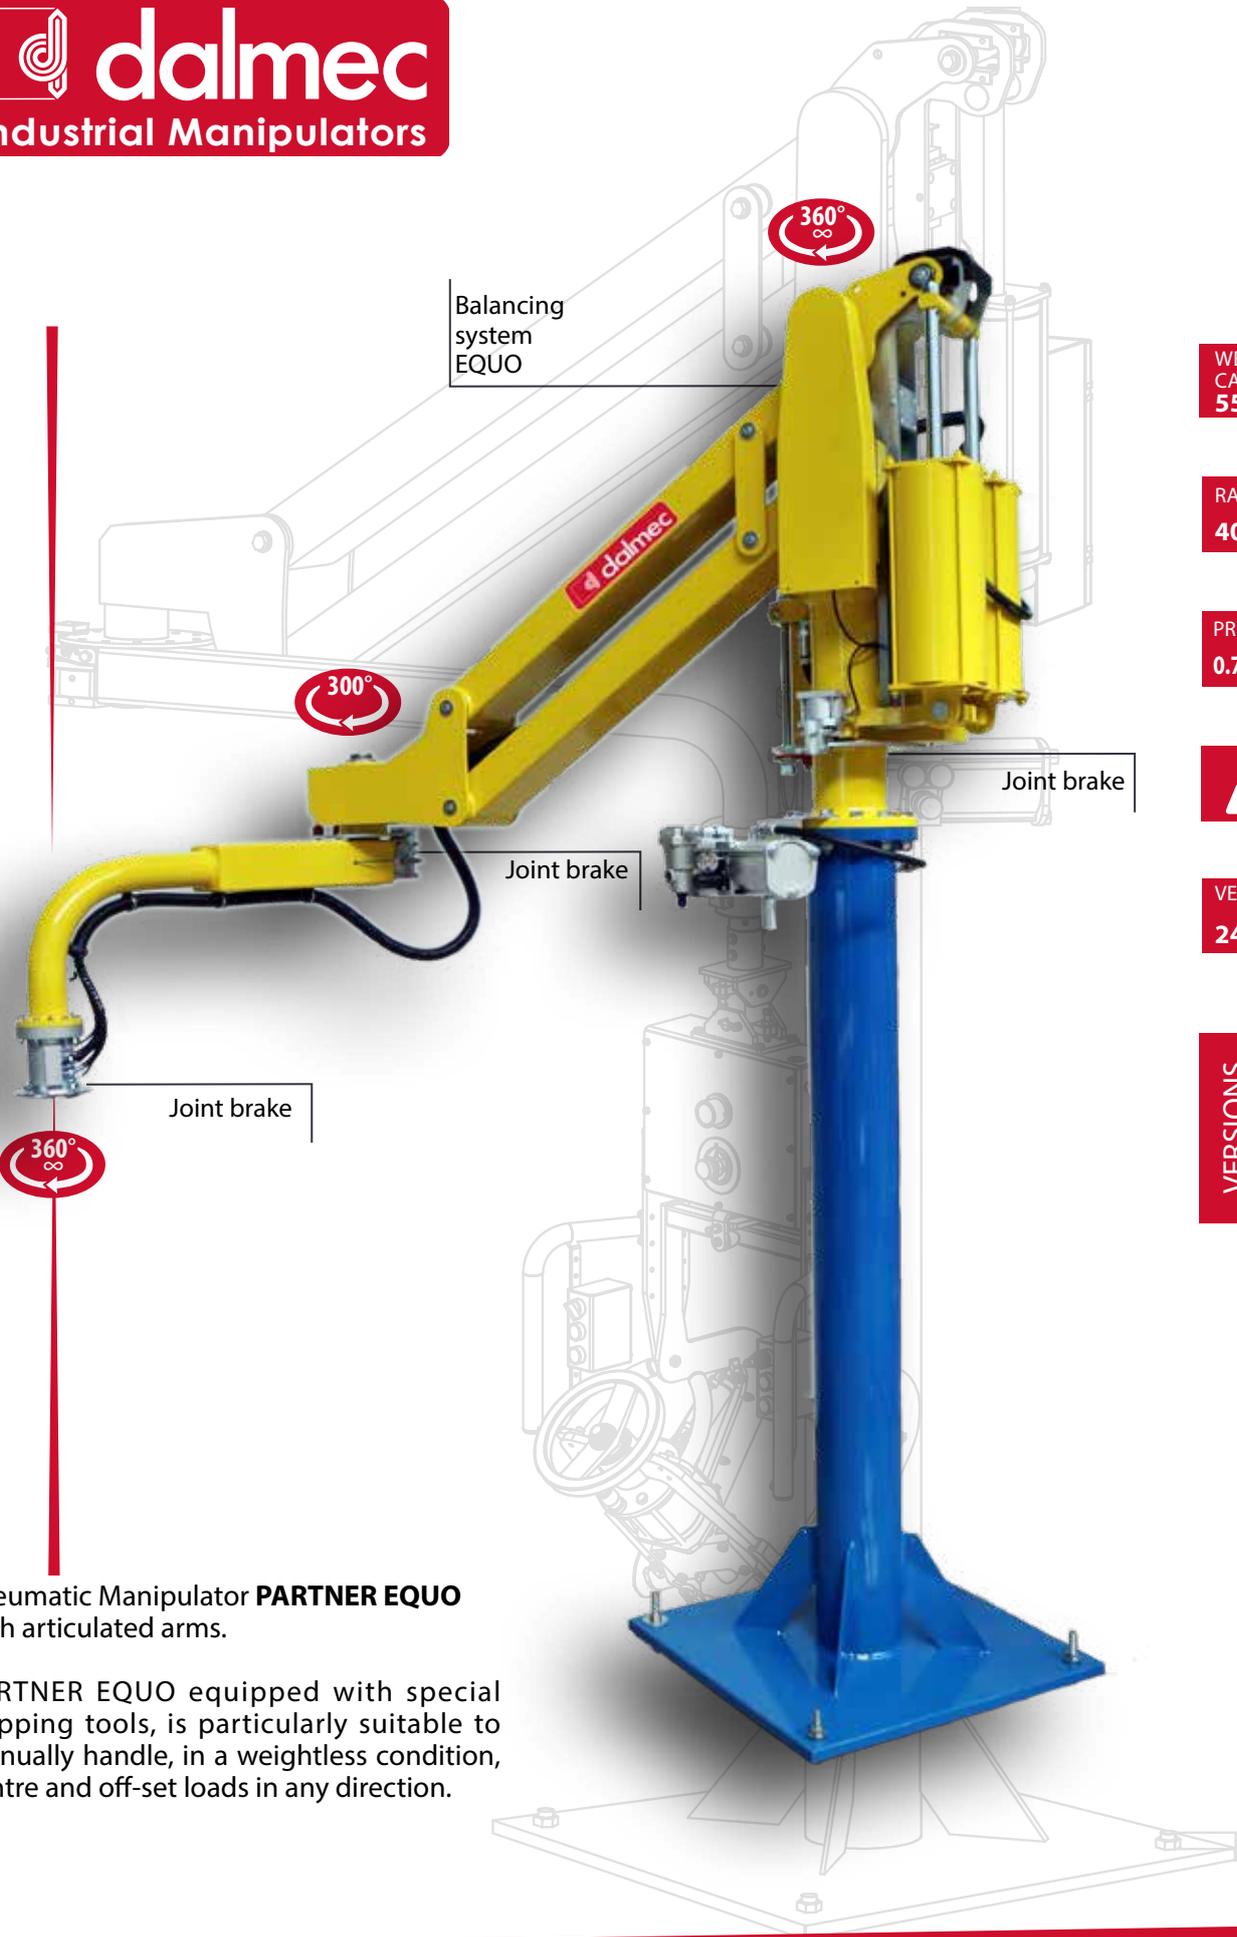

WEIGHT CAPACITY
550 kg

RADIUS
4000 mm

PRESSURE
0.7-0.8 Mpa

LOAD OFF-SET

VERTICAL LIFT
2450 mm

VERSIONS
COLUMN
FIXED OVERHEAD
RUNNING OVERHEAD


Pneumatic Manipulator **PARTNER EQUO** with articulated arms.

PARTNER EQUO equipped with special gripping tools, is particularly suitable to manually handle, in a weightless condition, centre and off-set loads in any direction.


PARTNER EQUO[®] - PE

PARTNER EQUO® - PE



Partner column mounted - PEC

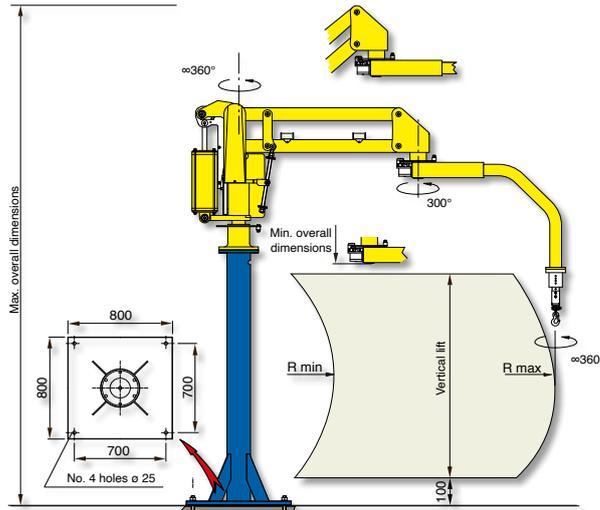



Structural versions: column mounted on fixed base-plate, autostable base-plate of our supply properly dimensioned or with autostable motorised trolley that translates on a simple profile track on the floor.

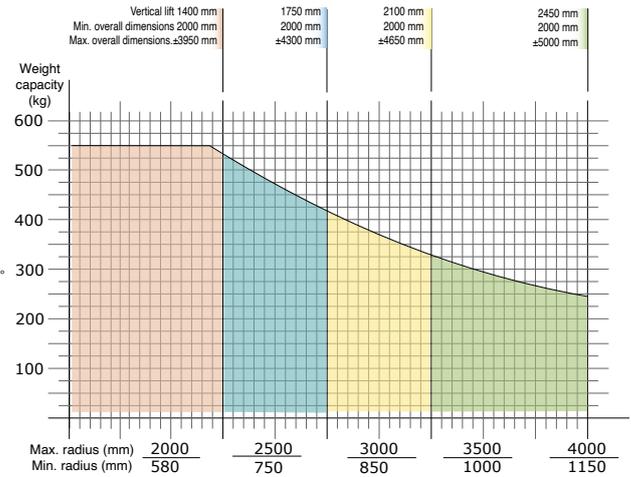

Partner overhead mounted - PEF

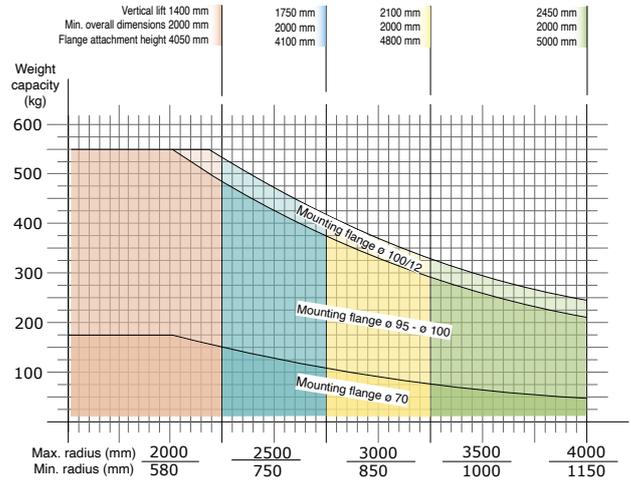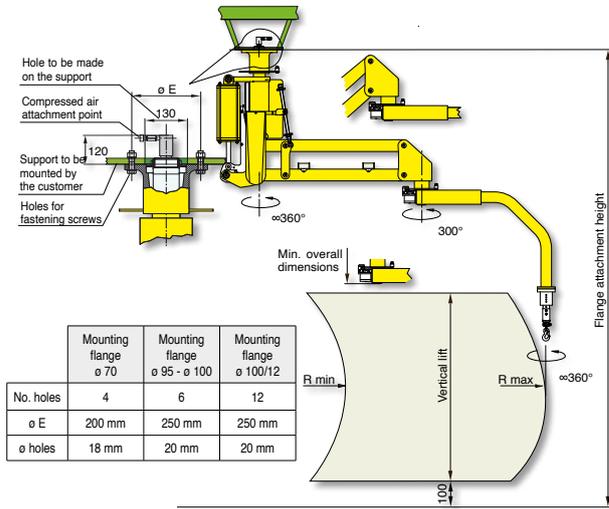


Partner overhead trolley mounted - PES

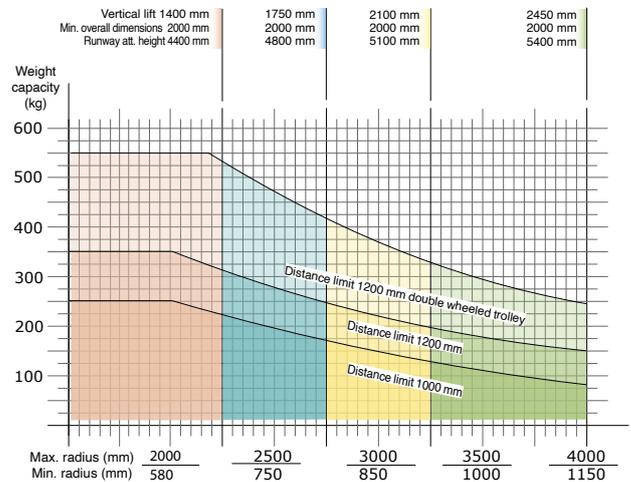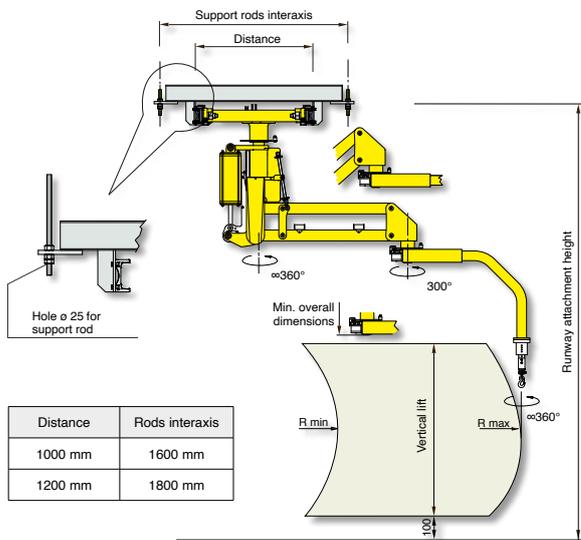

Air supply: dry and oil-free compressed air min. constant 0.7-0.8 MPa



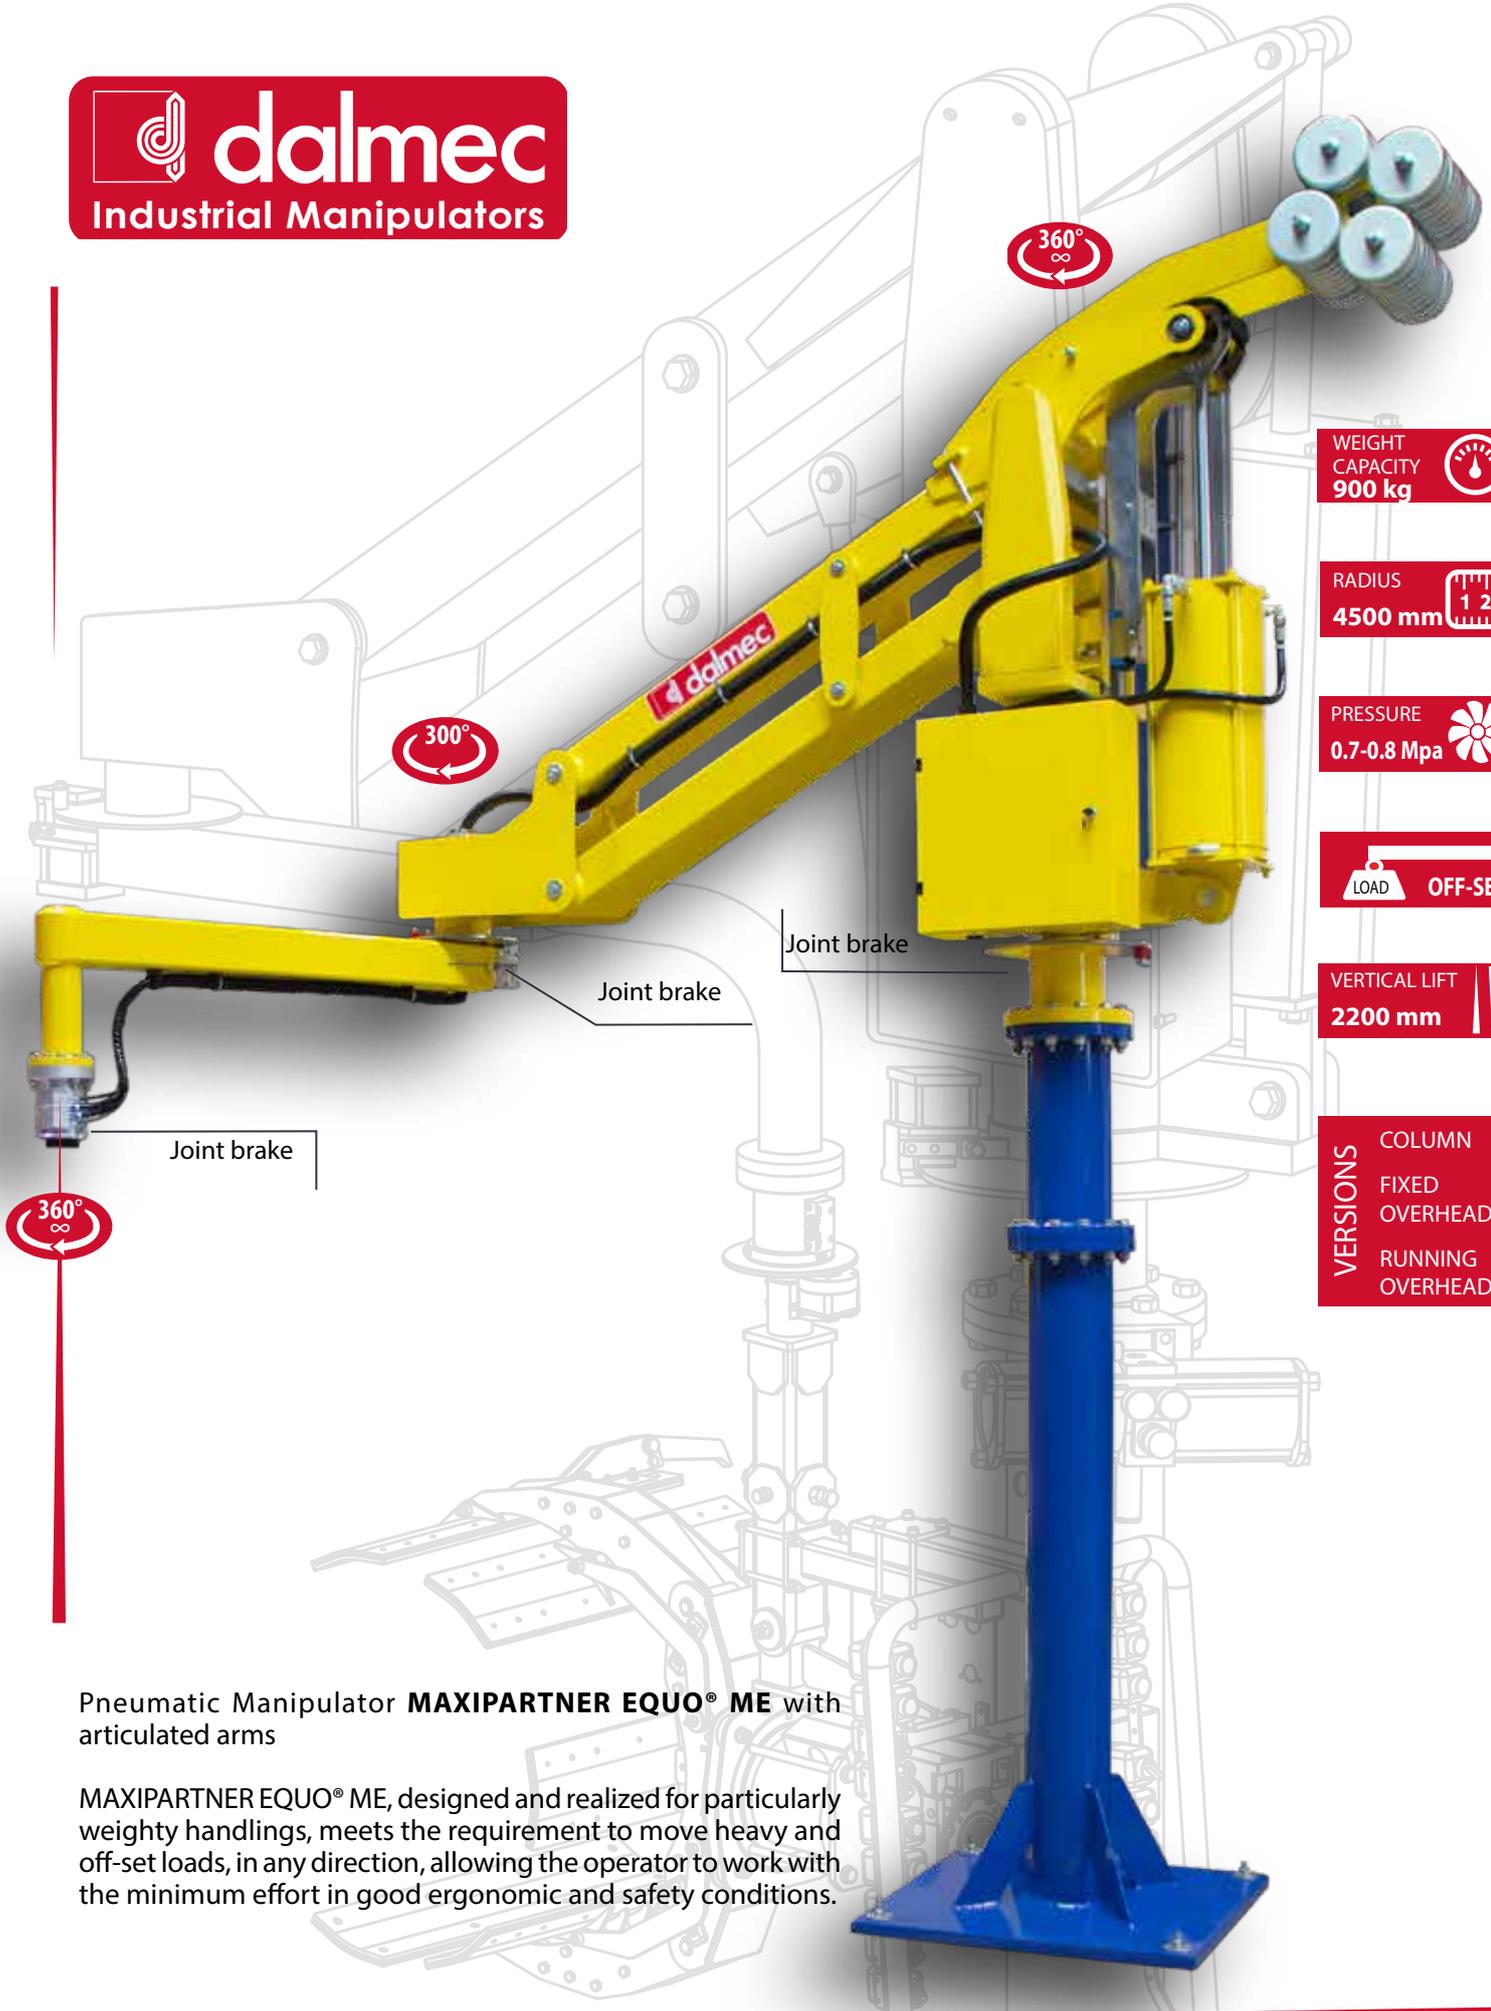

WEIGHT CAPACITY
900 kg



RADIUS
4500 mm



PRESSURE
0.7-0.8 Mpa



LOAD OFF-SET

VERTICAL LIFT
2200 mm


VERSIONS
COLUMN
FIXED OVERHEAD
RUNNING OVERHEAD

Pneumatic Manipulator **MAXIPARTNER EQUO® ME** with articulated arms


MAXIPARTNER EQUO® ME, designed and realized for particularly weighty handlings, meets the requirement to move heavy and off-set loads, in any direction, allowing the operator to work with the minimum effort in good ergonomic and safety conditions.

MAXIPARTNER EQUO® - ME



Maxipartner Equo® column mounted - MEC

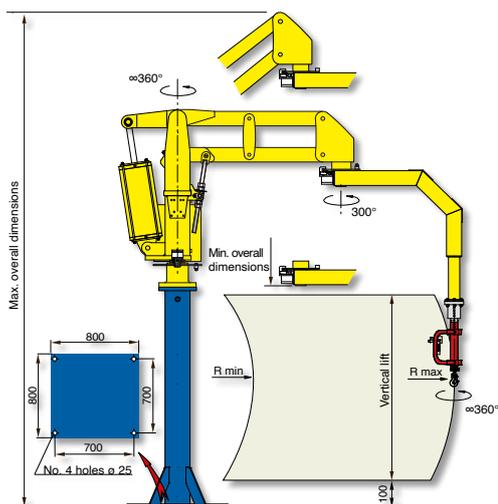



Structural versions: column mounted on fixed base-plate, autostable base-plate of our supply properly dimensioned or with autostable motorised trolley that translates on a simple profile track on the floor.

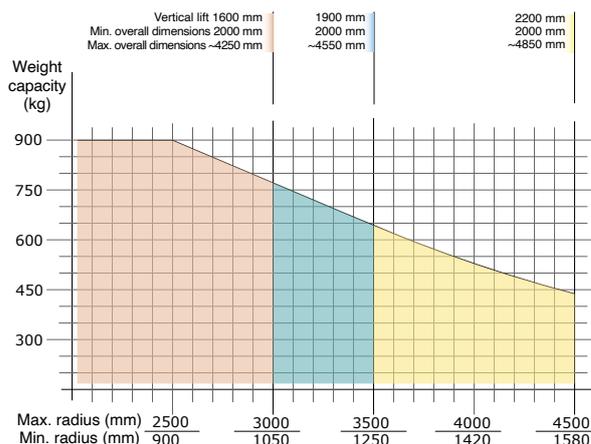

Maxipartner Equo® overhead mounted - MEF

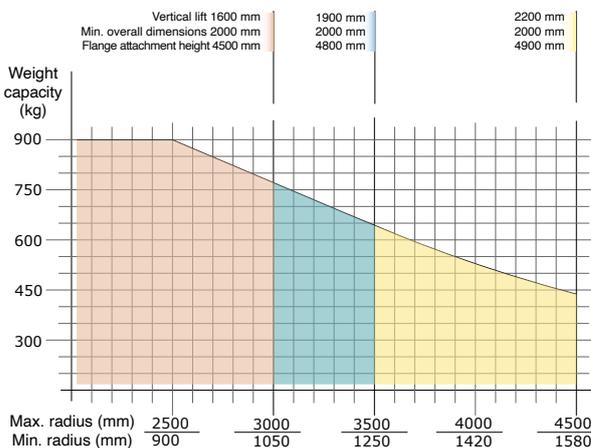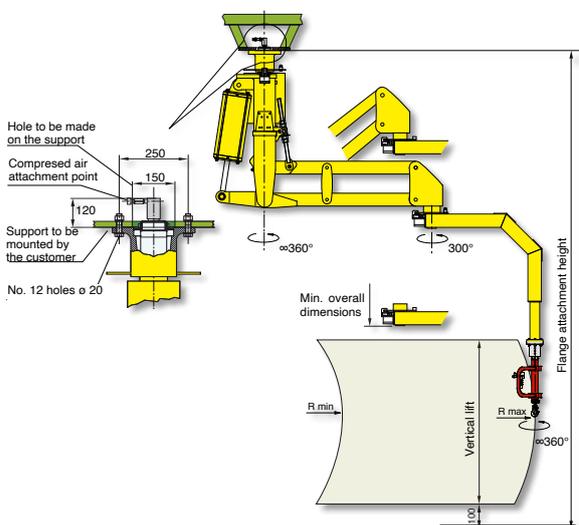


Maxipartner Equo® overhead trolley mounted - MES

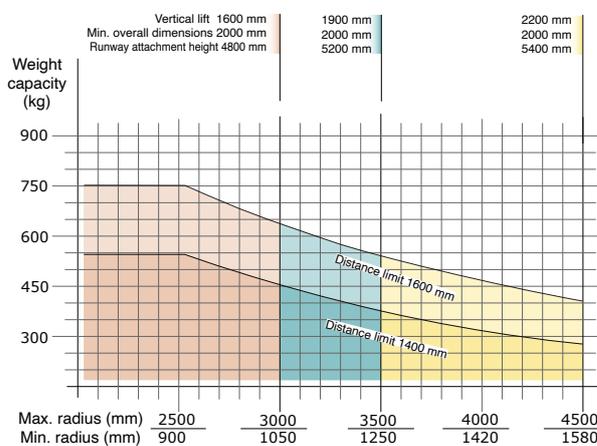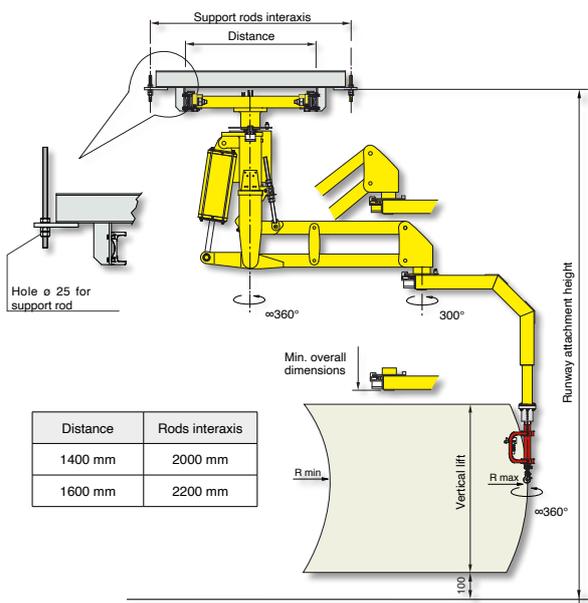

Air supply: dry and oil-free compressed air min. constant 0.7÷0.8 MPa



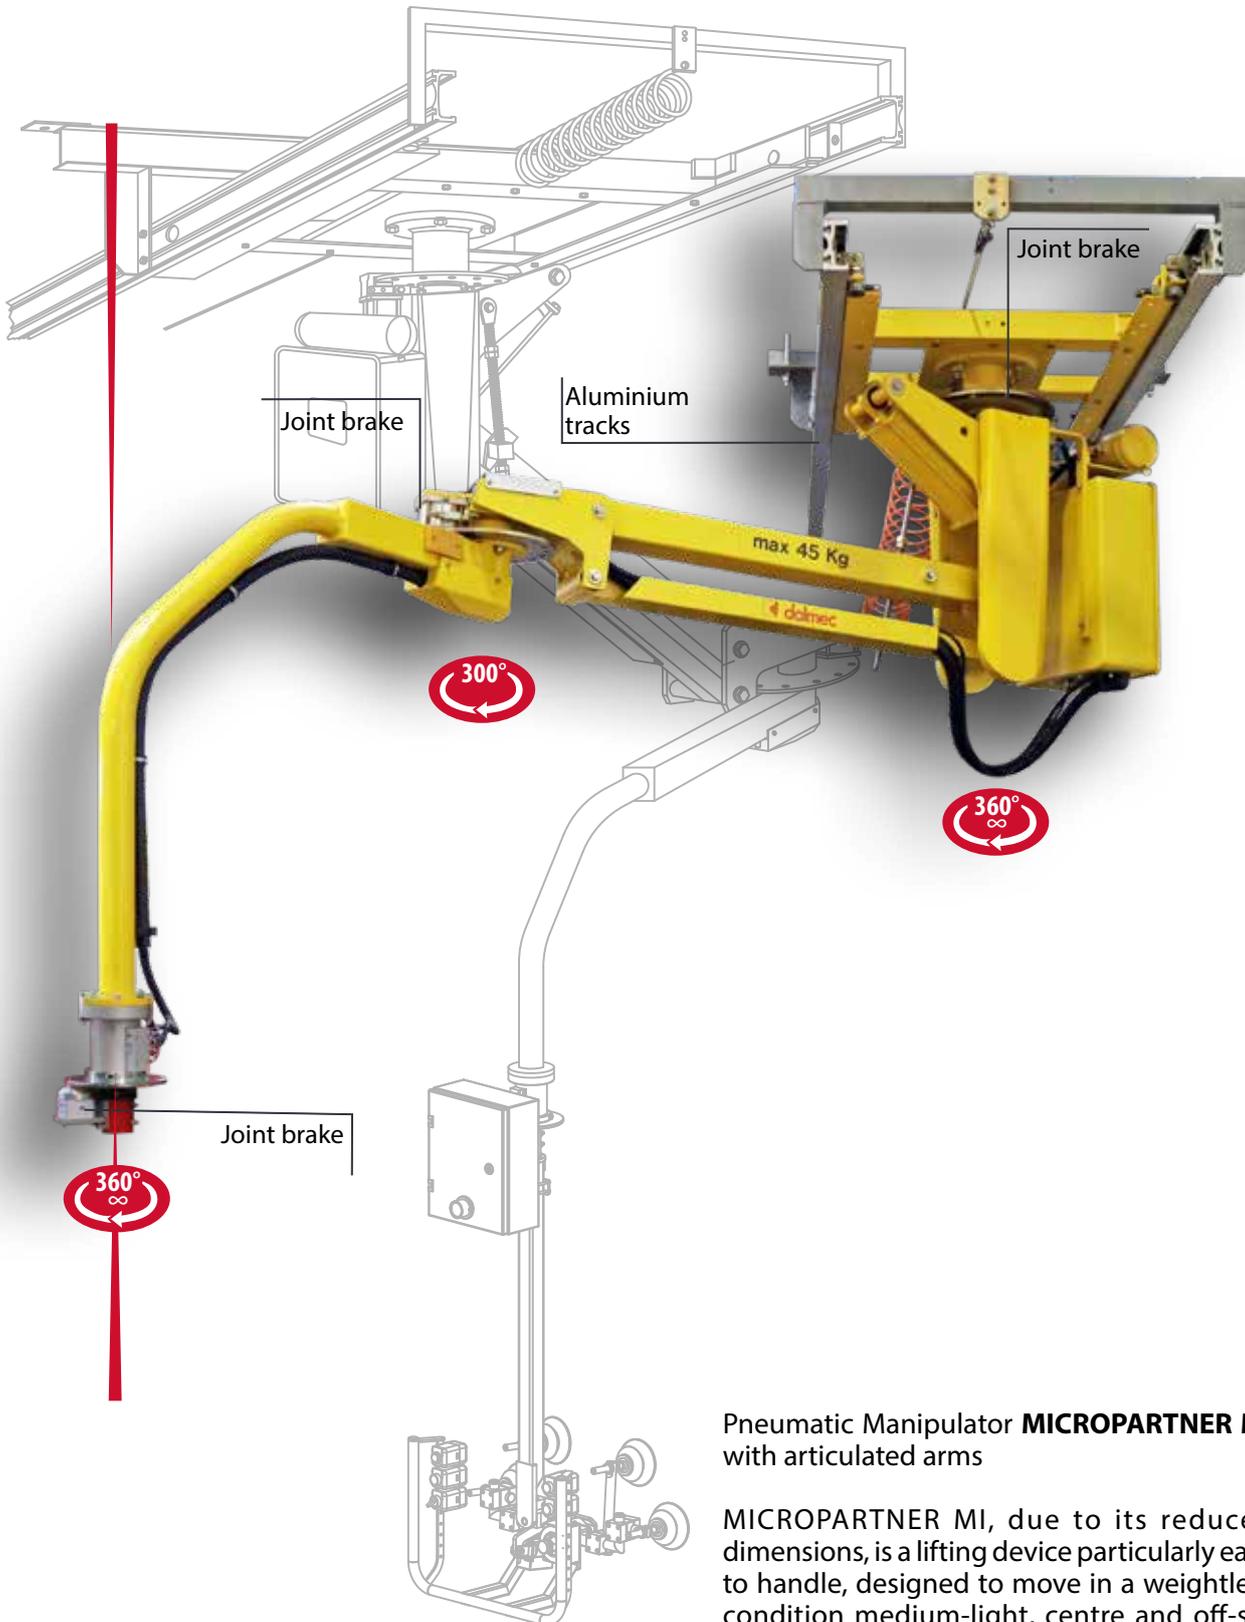

WEIGHT CAPACITY
125 kg



RADIUS
2800 mm



PRESSURE
0.7-0.8 Mpa



LOAD OFF-SET


VERTICAL LIFT
1400 mm

VERSIONS
COLUMN
FIXED OVERHEAD
RUNNING OVERHEAD


Pneumatic Manipulator **MICROPARTNER MI** with articulated arms

MICROPARTNER MI, due to its reduced dimensions, is a lifting device particularly easy to handle, designed to move in a weightless condition medium-light, centre and off-set loads in any direction.



Micropartner column mounted - MIC

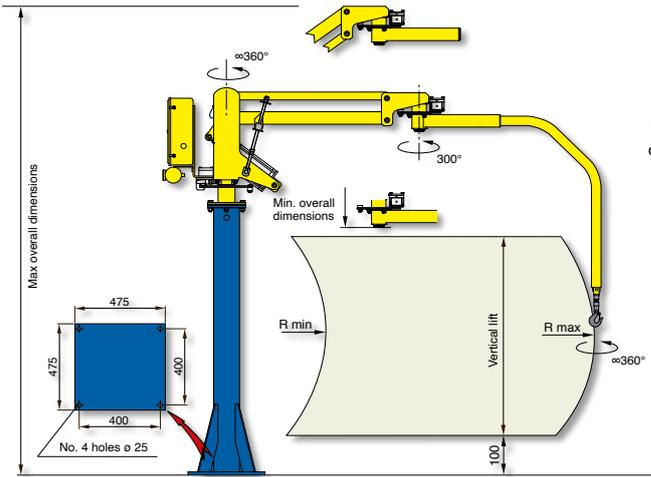

Structural versions: column mounted on fixed base-plate, autostable base-plate of our supply properly dimensioned or with autostable motorised trolley that translates on a simple profile track located on the floor.


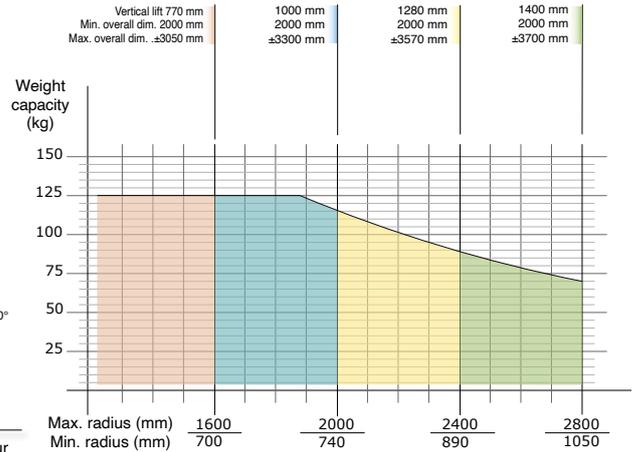


Micropartner overhead mounted - MIF

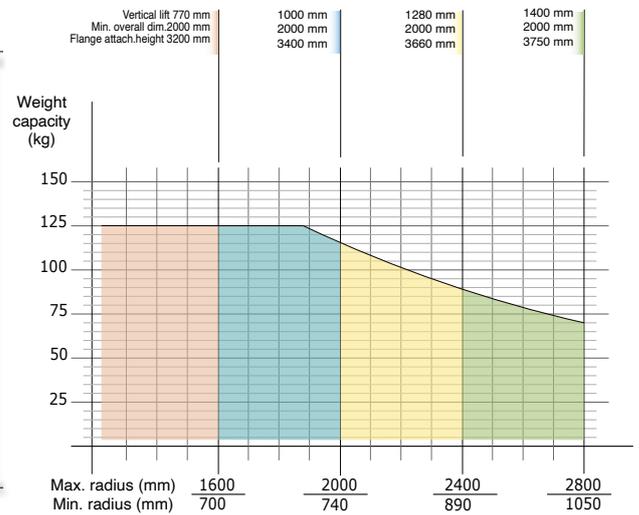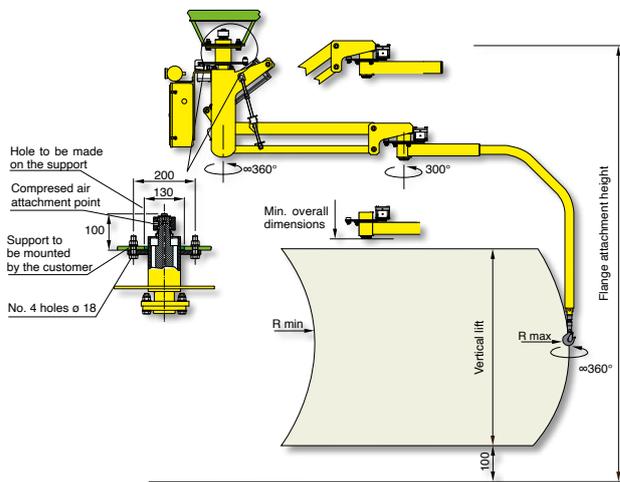

Configuration and measurements may change upon the Customer's specific requirements

Micropartner overhead trolley mounted - MIS

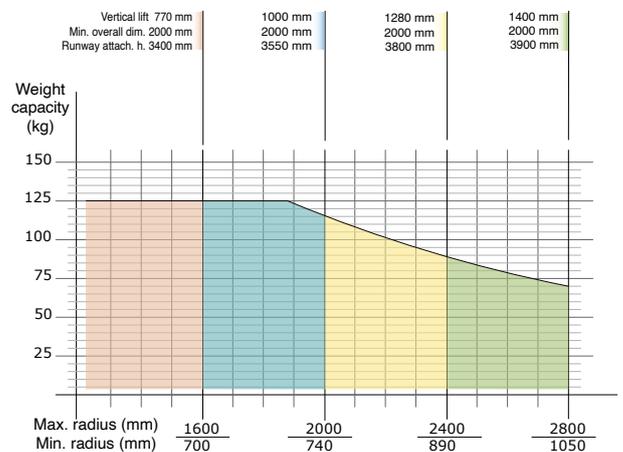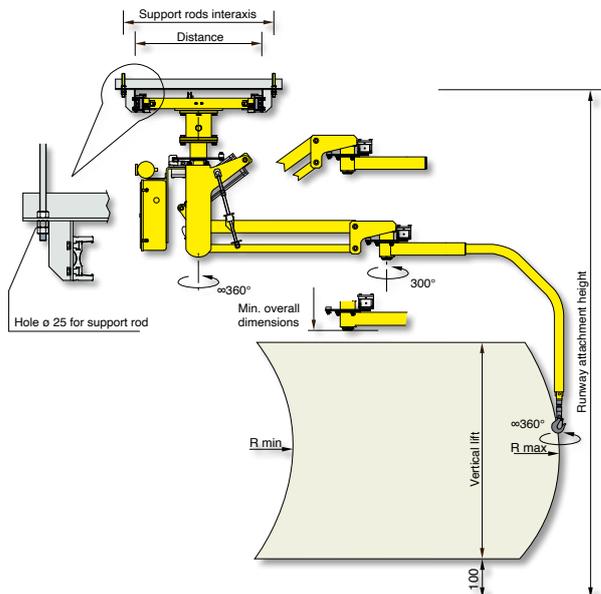

Air supply: dry and oil-free compressed air min. constant 0.7-0.8 MPa