


The Relentless Pursuit Of Perfection, Let's Make Machines Better

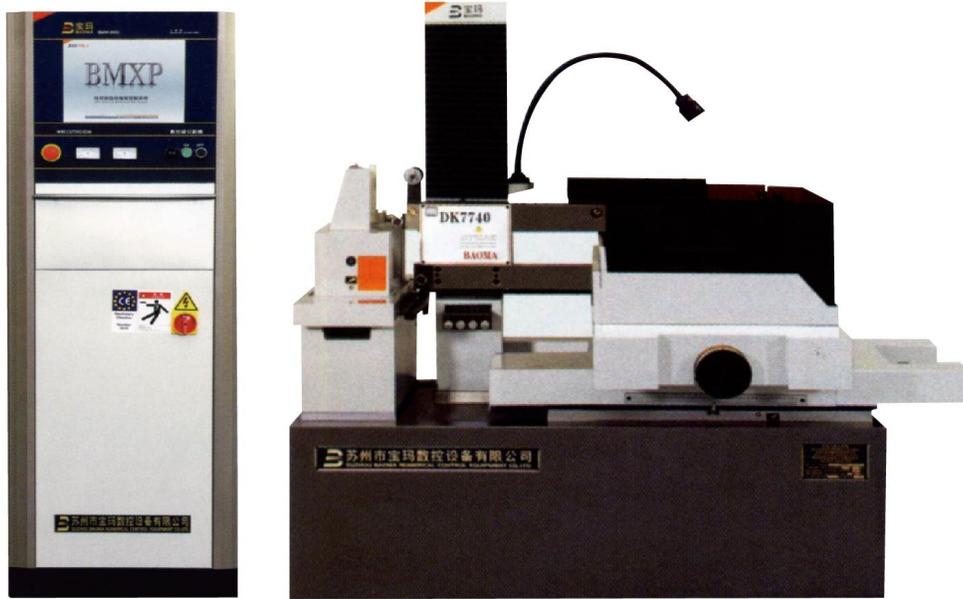

Specifications

Model	DK7725	DK7732	DK7740	DK7750	DK7763	DK7780
Table travel X x Y (mm)	250 x 320	320 x 400	400 x 500	500 x 630	630 x 800	800 x 1000
Table size L x W (mm)	380 x 525	415 x 635	500 x 785	600 x 900	660 x 110	820 x 1400
Max. cutting thickness (mm)	300 / 500	300 / 500	500	500	500 / 800	500 / 800
Taper angle	0° / 6° / 60°	0° / 6° / 60°	0° / 6° / 60°	0° / 6° / 60°	0° / 6° / 60°	0° / 6° / 60°
Roughness (um)	Ra ≤ 2.5 (once cutting) Ra ≤ 1.5 (multi-cutting)	Ra ≤ 2.5 (once cutting) Ra ≤ 1.5 (multi-cutting)	Ra ≤ 2.5 (once cutting) Ra ≤ 1.5 (multi-cutting)	Ra ≤ 2.5 (once cutting) Ra ≤ 1.5 (multi-cutting)	Ra ≤ 2.5 (once cutting) Ra ≤ 1.5 (multi-cutting)	Ra ≤ 2.5 (once cutting) Ra ≤ 1.5 (multi-cutting)
Precision (mm)	≤ 0.015	≤ 0.015	≤ 0.015	≤ 0.015	≤ 0.015	≤ 0.015
Screw and guide way	High quality ball screw linear guideway					
Load of table (kg)	300	400	500	800	3000	5000
Machine weight (kg)	1600	1700	2000	2300	4500	6700

Model : DK7750D / BMW3000 Medium Speed Wire Cut EDM

Specifications

Model	DK77100	DK77100 x150	DK77130 x 150	DK160 x 160	DK77120 x 200
Table travel X x Y (mm)	1000 x 1200	1000 x 1500	1300 x 1500	1600 x 1600	1200 x 2000
Table size L x W (mm)	1090 x 1600	1090 x 1700	1400 x 1900	1950 x 1950	1330 x 2440
Max. cutting thickness (mm)	500 / 800 / 100	500 / 800 / 100	500 / 800 / 100	500 / 800 / 1000	500 / 800 / 1000
Taper Angle	0° / 6° / 60°	0° / 6°	0° / 6°	0° / 6°	0° / 6°
Roughness (um)	Ra ≤ 2.5 (once cutting) Ra ≤ 1.5 (multi-cutting)	Ra ≤ 2.5 (once cutting) Ra ≤ 1.5 (multi-cutting)	Ra ≤ 2.5 (once cutting) Ra ≤ 1.5 (multi-cutting)	Ra ≤ 2.5 (once cutting) Ra ≤ 1.5 (multi-cutting)	Ra ≤ 2.5 (once cutting) Ra ≤ 1.5 (multi-cutting)
Precision (mm)	≤ 0.02	≤ 0.02	≤ 0.02	≤ 0.02	≤ 0.02
Screw and guide way	High quality ball screw linear guideway				
Load of table (kg)	5000	6000	6000	6000	6000
Machine weight (kg)	7000	7500	7800	10000	12000

Model : DK7750D / BMW3000 Medium Speed Wire Cut EDM

Sample Workpiece

