

*Trustworthy Tailift Equipment*

**Tailift**<sup>®</sup>  
台勵福集團

機種齊全，因應市場需求  
We Offer What You Need



高效率 旋臂鑽床  
HIGH EFFICIENCY AND PRECISION  
**RADIAL DRILLS**

**Tailift**

## 手動夾緊 Manual Clamping

- TPR-720A
- TPR-820A
- TPR-920A
- TPR-1100

- 主軸正逆轉採用自製機械式切換開關，長期使用不易損壞。
- 旋臂採高級鑄體翻鑄而成，其滑軌更經嚴格熱處理及精密研磨。
- 二馬力標準馬達可提供重切削下多種不同速度的選擇。
- 主軸採用特殊彈簧平衡，此種平衡機構較傳統耐用。
- 內裝多項極限，超負荷保護裝置，可兼顧操作之安全性。
- 特製進刀深度輔助環，可隨時顯示主軸進刀深度達全程210mm。(適用於TPR-720A, TPR-820A, TPR-920A)
- In-built Mechanical switch for Forward/Reverse functions and longer service life with low maintenance.
- Arm Slider made upon high-class cast-iron and processed under severe Heat-Treatment and well Ground.
- 2HP motor can provide various speed selection under heavy-duty cutting.
- The main spindle is balanced by specially designed spring which is more durable than all other traditional balance mechanism.
- The over-load protective devices can secure the operator against injury.
- Extra auxiliary dial for spindle feed depth indication. With this indicator, we can review the momental feed depth of spindle 1 through 210mm at any moment. (for TPR-720A, TPR-820A, TPR-920A)



▲ TPR-720A



▲ TPR-920A



▶ TPR-820A



▶ TPR-1100

## 電鎖夾緊 Electric Clamping

- TPR-1230

- 主軸正逆轉採用自製機械式切換開關，長期使用不易損壞。
- 旋臂採高級鑄體翻鑄而成，其滑軌更經嚴格熱處理及精密研磨。
- 三馬力變極馬達可提供重切削下多種不同速度的選擇。
- 內裝多項極限，超負荷保護裝置，可兼顧操作之安全性。
- In-built Mechanical switch for Forward/Reverse functions and longer service life with low maintenance.
- Arm Slider made upon high-class cast-iron and processed under severe Heat-Treatment and well Ground.
- 3HP two speeds motor can provide various speed selection under heavy-duty cutting.
- The over-load protective devices can secure the operator against injury.



◀ TPR-1230



電動夾緊型 (TPR-1230)  
Electric clamping (TPR-1230)

## 油壓夾緊 Hydraulic Clamping

○ TPR-1230H ○ TC-1250H ○ TC-1600H ○ TPR-1600H ○ TPR-2000H ○ TPR-C2500


- 旋臂升降係採用電子計時器控制，啟動按鈕即可完成旋臂自動放鬆並垂直升降，或升降停止並自動夾緊作業，易於操作，並在換刀後仍可保持原刀具中心位置。
- 旋臂升降機構附有安全裝置，以防止多年以後，因升降銅螺母過度磨損而旋臂突然掉落。
- 內裝齒輪專用型機油循環泵浦，以冷卻齒輪箱內精密齒輪，可降低齒輪過度磨損。  
(適用於TPR-1600H, TPR-2000H, TPR-C2500)
- 摩擦型離合器可吸收主軸所產生縱向衝擊力，故能有效地保護齒輪箱內所有傳動元件，並具有主軸快速回位功能，可加快攻牙作業速度。  
(適用於TPR-1600H, TPR-2000H, TPR-C2500)
- 機柱、旋臂、齒輪箱可同時夾緊，設有按鈕開關可使用。除TPR-1600H及TPR-2000H採用十字開關，其餘機種採用按鈕開關控制。
- 備有特殊設計自動退刀裝置，可大大增進退刀效率。  
(適用於TPR-1600H, TPR-2000H)
- 機柱、旋臂、齒輪箱可個別夾緊或同時夾緊，設有選擇開關可使用。  
(適用於TPR-C2500)
- 速度轉換採油壓傳動設計，且裝有速度預先調整裝置，快速且易於操作。  
(適用於TPR-C2500)
- The Radial Drill Arm adopts IC Timer with advantage of one bottom press, it can automatically release up/down movement, stop, and automatically clamping easy to operate. The spindle can still maintain in original set after the tools change.
- Special arm elevating safety device is provided to prevent arm from falling down abruptly after year of usage . It will keep us from injurious dropping whenever the copper nut is excessively worn.
- Exclusively for gears type cycling oil pump is furnished to cool off precise gears inside gear box, and minimize excessive wear on gears to lowest extent. (for TPR-1600H, TPR-2000H, TPR-C2500)
- Friction type disc clutch is adopted to absorb impact force caused by vertical movement of spindle, and effectively protect all transmission unit inside gear box. With the function of quick spindle return, this clutch will also help us to speed up our tapping operation. (for TPR-1600H, TPR-2000H, TPR-C2500)
- Column, Arm, Gear box can clamp at same time by a push button for all model machines except TPR-1600H and TPR-2000H which use cross switch.
- Automatic tool releasing device effectively increases tool changing. (for TPR-1600H, TPR-2000H)
- Equipped with hydraulic clamping system, with proper selection on change switch, column, arm, gear box can be clamped/released independently. (for TPR-C2500)
- Speed Changing function is driven by hydraulic power and equipped with quick preset device for TPR-C2500.

### 標準附件

調節用工具(含工具箱)... 1 套  
冷卻裝置(含泵浦)..... 照 1 套  
明裝置(含日光燈)..... 箱 1 套  
型工作檯 ..... 1 套

### Standard Accessory:

Adjustment tools (box included) 套.....1 set  
Cooling device (pump included) .....1 set  
Lighting device (fluorescent lamp included)1 set  
Box-type work table .....1 set

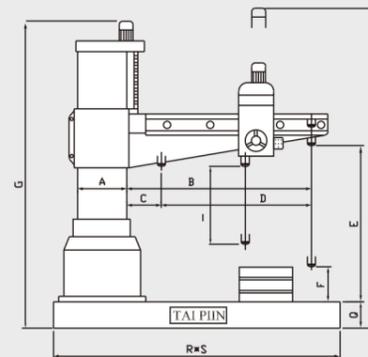

### 特殊附件

可傾斜工作檯 1套 單式傾斜工作檯，可傾斜到90度，有刻度指示針 可告知傾斜度。可傾斜工作檯亦可用於其他加工工作母機上面。

攻牙器-DT33-MT#4.....1套  
攻牙器-DT33-MT#5.....1套  
萬能夾具-5/8"..... 1套  
萬能夾具-3/4"..... 1套  
萬能夾具-18mm.....1套

### Special Optionals/Tilt Tables

Uni-tilt table tilts full 90 degrees. Calibrated indicator shows degree of tilt has accurately planed top.

DT33-MT#4 Drill Tapping Set .....1 set  
DT33-MT#5 Drill Tapping Set .....1 set  
5/8" Clamping Kits .....1 set  
3/4" Clamping Kits .....1 set  
M18 Clamping Kits .....1 set

### 尺寸規格 (長×寬×高)

1. 810×710×610m/m (大)  
2. 520×510×570m/m(小)

### Dimensions ( L x W x H )

1. 810x710x610m/m (Large size) Application: TC-1250H/TC-1600H/TPR-1600H TPR-2000H/TPR-C2500
2. 520x510x570m/m (Small size) Application: TPR-720A-1600H



▲ TPR-1230H




▲ TC-1250H



▲ TC-1600H



▲ TPR-1600H

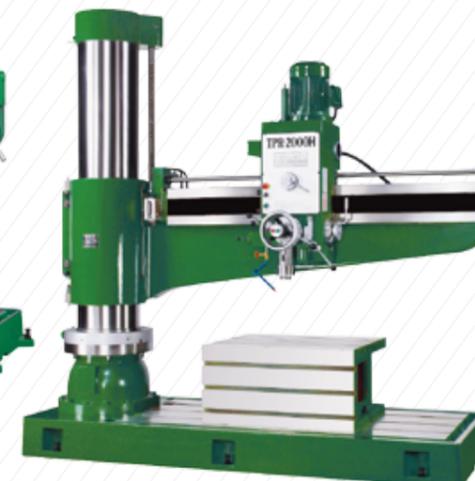

▲ TPR-2000H




▲ TPR-C2500



油壓夾緊型 (TC-1250H, TC-1600H)  
Hydraulic clamping (TC-1250H, TC-1600H)




- ① 鎖緊開關  
P/B switch for clamping
- ② 主軸正反轉開關  
Lever for spindle forward/reverse turn
- ③ 臂手下降開關  
P/B switch for arm down
- ④ 臂手上升開關  
P/B switch for arm uplift
- ⑤ 放鬆開關  
P/B switch for release
- ⑥ 變極開關  
Pole change switch
- ⑦ 電流指示燈  
Power indicator

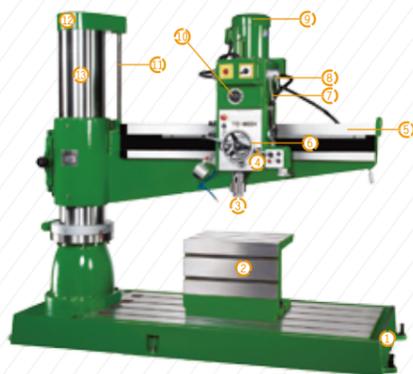

- ① 底座  
Base
- ② 箱型工作台  
Box-type work table
- ③ 主軸  
Spindle
- ④ 進給速率切換開關  
Feed rate change switch
- ⑤ 傳動導螺桿  
Lead screw
- ⑥ 帽蓋  
Top cover
- ⑦ 手輪  
Handwheel
- ⑧ 三段變速桿  
Three step speed change lever
- ⑨ 二段變速桿  
Two step speed change lever
- ⑩ 進給速率切換開關  
Feed rate change switch
- ⑪ 傳動導螺桿  
Lead screw
- ⑫ 帽蓋  
Top cover
- ⑬ 進給速率切換開關  
Feed rate change switch
- ⑭ 傳動導螺桿  
Lead screw
- ⑮ 帽蓋  
Top cover



- ① 進刀速率選擇  
Structure of feed lever
- ② 退刀控制桿  
Ejecting lever
- ③ 離合器控制桿  
Horn
- ④ 十字開關  
Cross switch
- ⑤ 進刀手動/自動控制桿  
Swing lever
- ⑥ 變速桿  
Change lever
- ⑦ 高/低速; 正/逆轉選擇桿  
H.L change lever

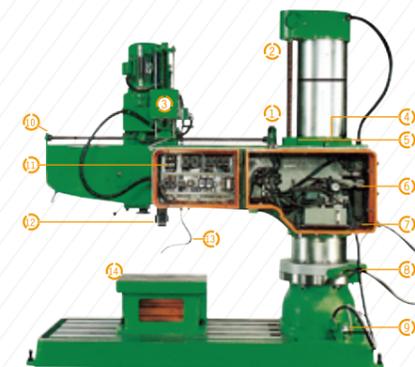

- ① 控制齒箱鎖緊放鬆之油  
Oil cylinder base for fasten & loosen gear box
- ② 導螺桿  
Leadscrew
- ③ 主軸重力平衡裝置  
Spindling weight counter balance unit
- ④ 上極限開關  
Limit switch, upper
- ⑤ 旋臂升/降安全裝置  
Special arm raising safety device
- ⑥ 油壓控制鈕  
Hydraulic control unit
- ⑦ 下極限開關  
Limit switch, lower
- ⑧ 油壓缸  
Hydraulic cylinder
- ⑨ 齒箱鎖緊放鬆導桿  
Leader for fasten & loosen gear box
- ⑩ 電氣控制箱  
Electric control unit
- ⑪ 主軸/排齒管組  
Spindle and quill
- ⑫ 冷卻噴嘴  
Coolant nozzle
- ⑬ 箱型工作台  
Plain box table

型號 / MODEL		緊急開關	TPR-720A	TPR-820A	TPR-920A	TPR-1100A	TPR-1600H
大柱直徑	Dai. of column	Emergency stop switch	Arm 210	260	300	A	
主軸中心至機柱表面距離	Distance from column surface to spindle center, Max	最大切削液切換開關	750	850	950	1120	1230
主軸中心至機柱表面距離	Distance from column surface to spindle center, Min	最大機油指示油位	225	230	210	270	330
主軸頭部在旋臂上水平移動行程	Horizontal travel of spindle head	冷卻水指示燈	540	640	755	850	880
主軸末端至底座加工距離	Distance from base surface to spindle end, Max	主軸進刀速率指示燈	1050	1210	1225	1280	1360
主軸末端至底座加工距離	Distance from base surface to spindle end, Min	緊急停止按鈕	260	375	385	480	467
旋臂在機柱上垂直升降行程	Elevating height of Arm	切削液調整開關	580	625	625	560	620
箱型工作台尺寸有效工作範圍	Effective area of box table	冷卻水調整開關	600x445x380		635x520x415	635x520x415	20x415
底座尺寸(長x寬x厚)	Dimension of base	冷卻水調整開關	1250x640x160	1250x640x160	1260x640x160	1720x715x185	1720x715x185
主軸孔模式推拔番號	Taper hole spindle		MT#4		MT#4	MT#4	
主軸垂直行程	Stroke of spindle		210		240	270	I
主軸轉速	R.P.M of spindle	50	73~124		37~1253x12		
(空載轉速/分鐘x段數)	(rpm x steps)	HZ	7x6		44~1500x12		
主軸進刀速(m/m/轉x段數)	Feed of spindle (rev.x steps)	60	0.085, 0.109, 0.15x3		0.05, 0.09, 0.15x3		0.05, 0.09, 0.15x3
主軸驅動馬達馬力數	Main motor (HP)	HZ	0x2HP		3(two speed motor)		3(two speed motor)
旋臂升降馬達馬力數	Elevating motor (HP)		1HP		1HP	1HP	
機柱旋臂夾緊裝置馬力數	Clamping motor(HP)				1HP		
冷卻泵馬達馬力數	Coolant equipment (HP)		1/8HP		1/8HP	1/8HP	
齒輪箱頂端至地面距離-最大	Machine height from floor (Max.)		21	23	2340	25	2670
機柱帽蓋頂端馬達至地面高度	Base + column height		60	20	2020	70	2070
單機淨重(約)	Net weight (approx)kgs		18	20	1280	19	2100
裝箱後毛重(約)	Shipping weight (approx)kgs		20	10	1400	90	2300
裝箱尺寸(長x寬x高)	Shipping dimensions (LxWxH)		1630x810x210	1680x810x2210	1800x810x2210	1880x860x2210	2030x990x2240
工作 能力 Capacity	鑽孔Drilling	中碳鋼Steel	75	92	92	42	
		鑄鐵 Cast iron	13	13	13	0	
	攻牙Tapping	中碳鋼Steel	20	50	56	55	
		鑄鐵 Cast iron		0	0	0	

\*上述列示規格公差介於 +/- 5 mm。  
\*Above listed specifications are within +/-5mm tolerances.  
\*以上參數僅供參考, 如有變更恕不另行通知。  
\*Above specifications for reference only, modifications are not subject to notice in advance.

型號 / MODEL		手輪	TPR-1230H	TC-1250H	TC-1600H	TPR-1600H
大柱直徑	Dai. of column	手輪	300	300	320	320
主軸中心至機柱表面距離	Distance from column surface to spindle center, Max	油鏡	1230	1275	1650	1550
主軸中心至機柱表面距離	Distance from column surface to spindle center, Min	最大機油指示油位	330	305	330	440
主軸頭部在旋臂上水平移動行程	Horizontal travel of spindle head	最大機油指示油位	880	970	1320	1110
主軸末端至底座加工距離	Distance from base surface to spindle end, Max	最大機油指示油位	1360	1330	1405	1640
主軸末端至底座加工距離	Distance from base surface to spindle end, Min	最大機油指示油位	467	438	465	380
旋臂在機柱上垂直升降行程	Elevating height of Arm	放鬆鈕	620	625	670	875
箱型工作台尺寸有效工作範圍	Effective area of box table	放鬆鈕	635x520x415	635x520x420	630x500x500	700x500x400
底座尺寸(長x寬x厚)	Dimension of base	放鬆鈕	1720x715x185	1830x785x185	2550x970x200	2470x1030x200
主軸孔模式推拔番號	Taper hole spindle		MT#4	MT#5	MT#5	MT#6
主軸垂直行程	Stroke of spindle		270	270	370	450
主軸轉速	R.P.M of spindle	50	37~1253	44~1206	29~1575	16~1250
(空載轉速/分鐘x段數)	(rpm x steps)	HZ	x12	x12	x12	x16
主軸進刀速(m/m/轉x段數)	Feed of spindle (rev.x steps)	60	0.04-0.15x3	0.05-0.10x3	0.05-0.10x3	0.04-0.10x3
主軸驅動馬達馬力數	Main motor (HP)	HZ	3(two speed motor)	3(two speed motor)	7-21/2HP	10HP
旋臂升降馬達馬力數	Elevating motor (HP)		1HP	1HP	2HP	2HP
油壓泵馬達馬力數	Hydraulic clamping motor(HP)		1HP	1HP	1HP	1HP
冷卻泵馬達馬力數	Coolant equipment (HP)		1/8HP	1/8HP	1/8HP	1/4HP
齒輪箱頂端至地面距離-最大	Machine height from floor (Max.)		2670	279	27	31
機柱帽蓋頂端馬達至地面高度	Base + column height		2070	5	90	30
單機淨重(約)	Net weight (approx)kgs		2100	207	21	26
裝箱後毛重(約)	Shipping weight (approx)kgs		2300	0	90	60
裝箱尺寸(長x寬x高)	Shipping dimensions (LxWxH)		2030x990x2240	2200x1000x2240	2700x5100x2420	2430x2820x1450
工作 能力 Capacity	鑽孔Drilling	中碳鋼Steel	42	0	50	00
		鑄鐵 Cast iron	0	250	0	36
	攻牙Tapping	中碳鋼Steel	55	0	60	50
		鑄鐵 Cast iron	0	0	0	0

\*上述列示規格公差介於 +/- 5 mm。  
\*Above listed specifications are within +/-5mm tolerances.  
\*以上參數僅供參考, 如有變更恕不另行通知。  
\*Above specifications for reference only, modifications are not subject to notice in advance.